
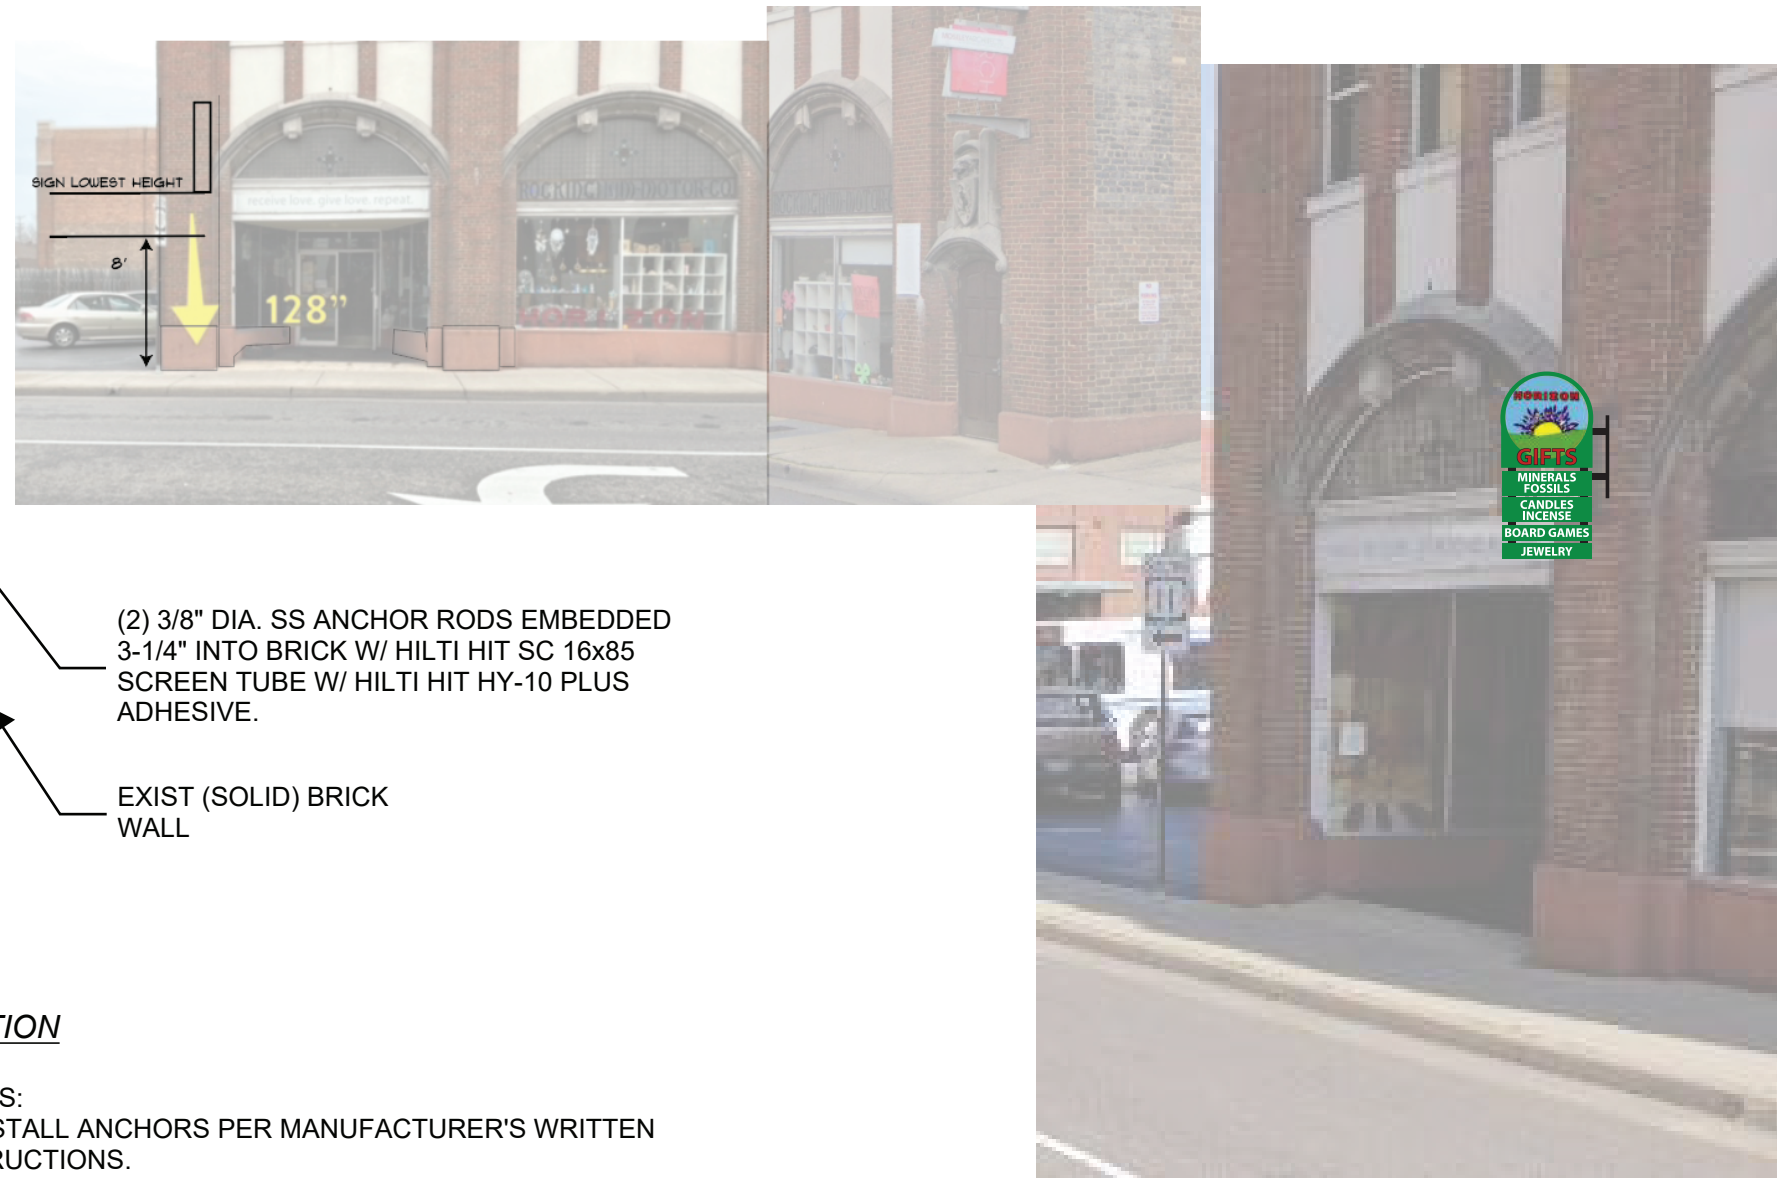


Aluminum arm and plate

Aluminum non lighted box, 65" x 32"

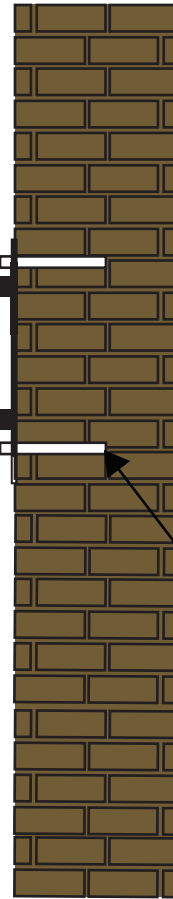

(2) 3/8" DIA. SS ANCHOR RODS EMBEDDED
3-1/4" INTO BRICK W/ HILTI HIT SC 16x85
SCREEN TUBE W/ HILTI HIT HY-10 PLUS
ADHESIVE.

EXIST (SOLID) BRICK
WALL

WALL SECTION/SIGN ELEVATION
NTS

BUILDING ELEVATION/PERSPECTIVE
NTS

NOTES:

1. INSTALL ANCHORS PER MANUFACTURER'S WRITTEN INSTRUCTIONS.
2. PRIOR TO INSTALLATION, INSPECT BRICK AND MORTAR JOINTS TO ENSURE BRICK WALL IS COMPETENT TO BE ANCHORED TO.
3. FIELD VERIFY BRICK COURSING, AND SET ANCHOR SPACING IN ANCHOR PLATE SUCH THAT ANCHORS ARE VERTICALLY SPACED TO BE CENTERED IN EACH BRICK (ANCHORS SPACED EVERY-OTHER COURSE MIN.)
4. ANCHORS SHOULD BE INSTALLED NO CLOSER THAN 8 INCHES TO END/CORNER/EDGE OF BRICK WALL.

Monteverde
Engineering & Design Studio
250 E. Elizabeth St, Suite 114 • Harrisonburg, VA 22802
540.228.0202 | www.monteverdedesigns.com

This seal covers the design of installation/
mounting of signage only. Owner/ Building
Engineer of Record shall ensure wall
structure has adequate capacity to support
the signs indicated.

Muddy Feet LLC
2061 Evelyn Byrd Ave, Suite E
Harrisonburg, VA 22801
540-574-3338

VA Lic 2705155482
UL 1553523, E487560
Licensed and Insured

Project: Horizon Gifts
Reference: 36532 Contact: Rich Ruozi
Date: 8/8/2022

EXHIBIT A